



Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Redundant

Complementary

Input voltage	230 V AC 170...276 V 115 V AC 93...138 V 47...63 Hz
Input current	1100 mA 115 V 600 mA 230 V
Inrush current	19 A 230 V 38 A 115 V
Rated power in VA	130 VA
Associated fuse rating	2 A slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	8 A 60 °C redundant
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	6 + (1.5 x I _{out}) where I _{out} is in A
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	0.65 kg

Environment

Standards	UL 508 CSA C22.2 No 142
Product certifications	FM Class 1 Division 2

CUL

Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1350 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available End of Life Information
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

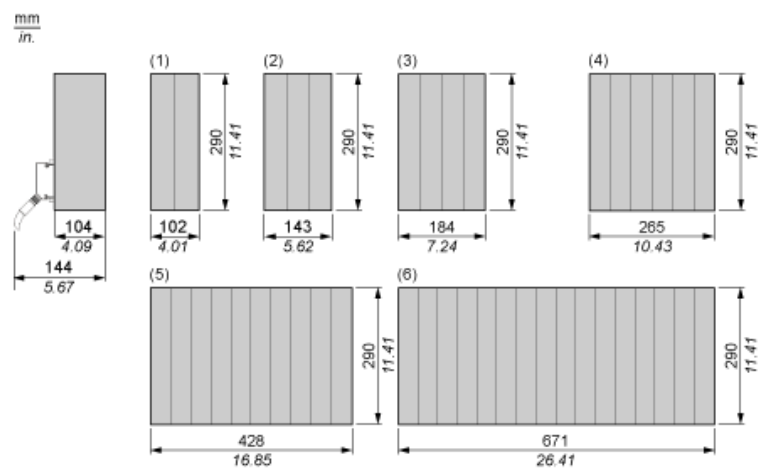

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

115/230 Vac, 8 A Redundant Power Supply Module

Wiring Diagram

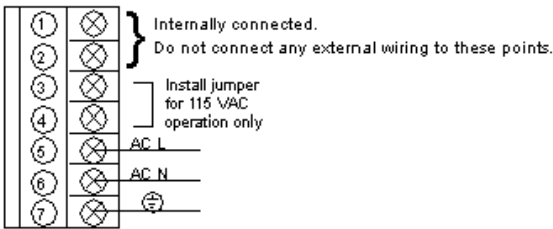

140CPS12400 is replaced by:



Standard environment BMXCPS4002

power supply module X80 - 100..240 V AC

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2021 | Not same dimensions/design - new smart diagnostic functions embedded